


## Konfiguration des TP-Link WLAN Adapters im Fun4Four


1. Den TP-Link WLAN Adapter über USB Kabel und Netzwerkkabel an den PC anstecken.




2. Den „**Test-Knopf**“ betätigen.

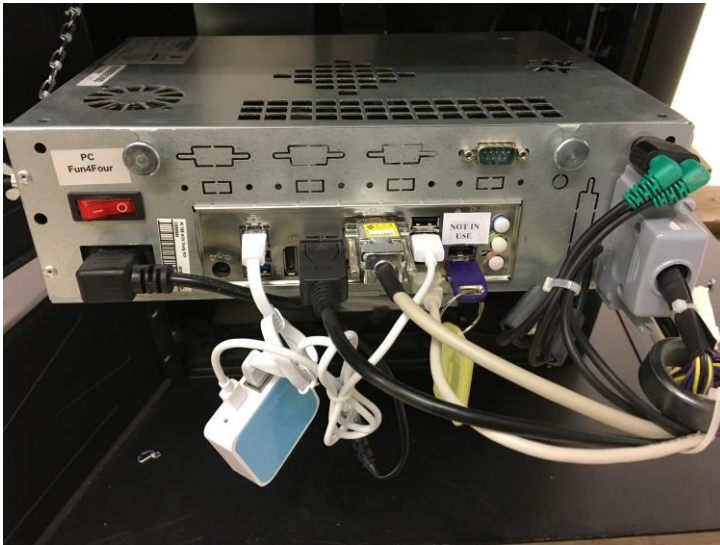


3. Im Testmodus die Option „**Championsnet**“ auswählen.

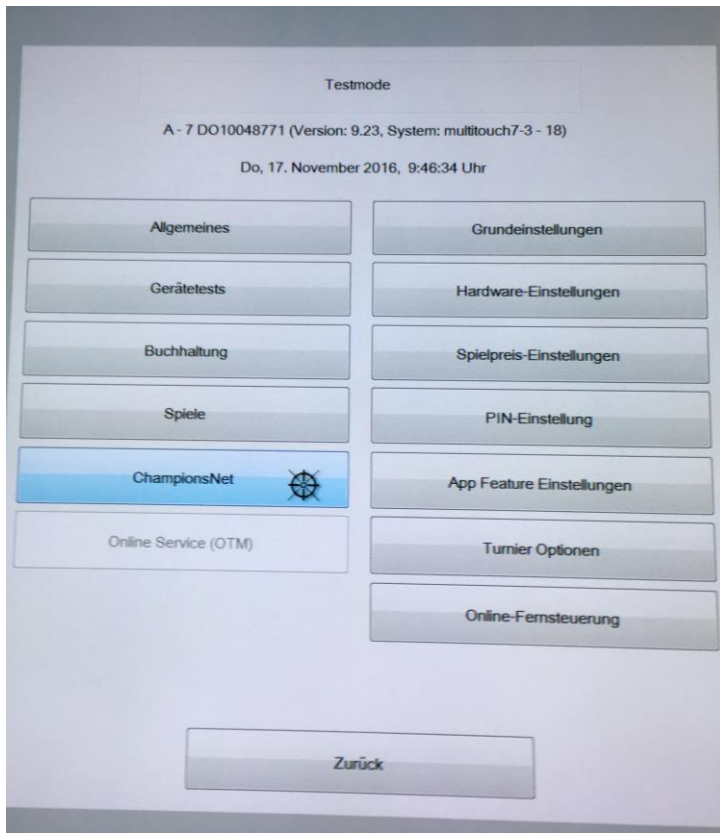


4. Unter Verbindung (Network/Direct) auf „**ändern**“ klicken.

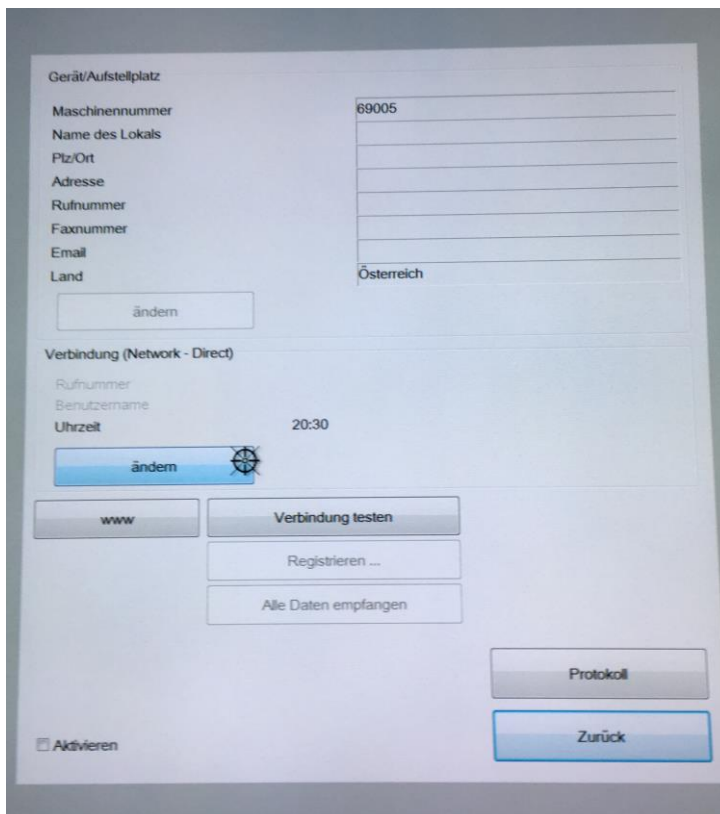

5. Nun unter Verbindung auf „**WLAN Konfiguration**“ klicken.

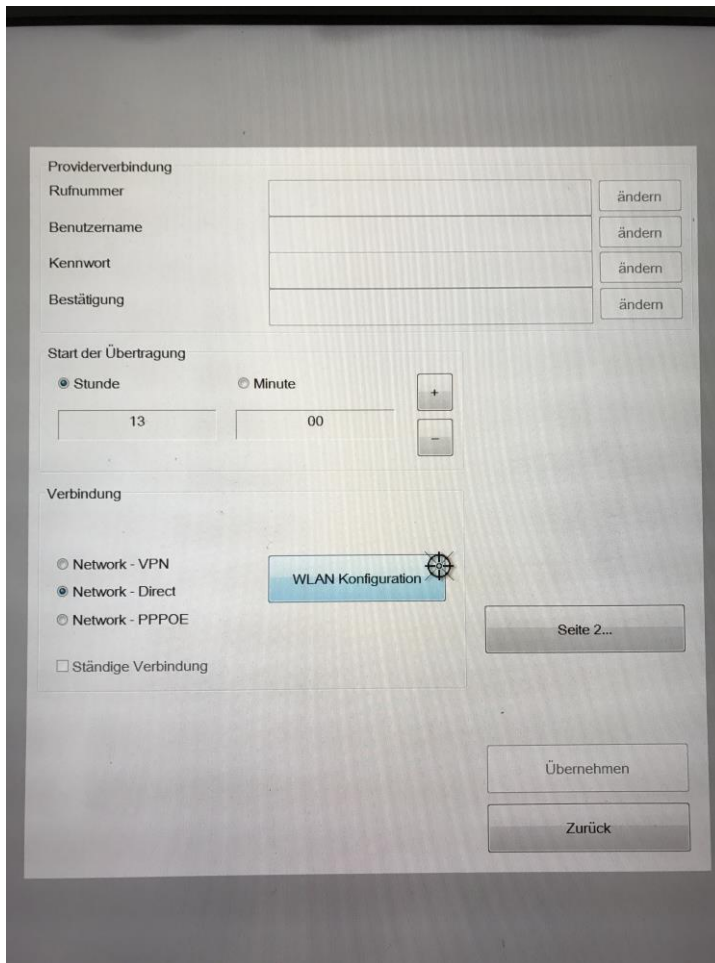

6. „**Configure WLAN Adapter**“ auswählen.

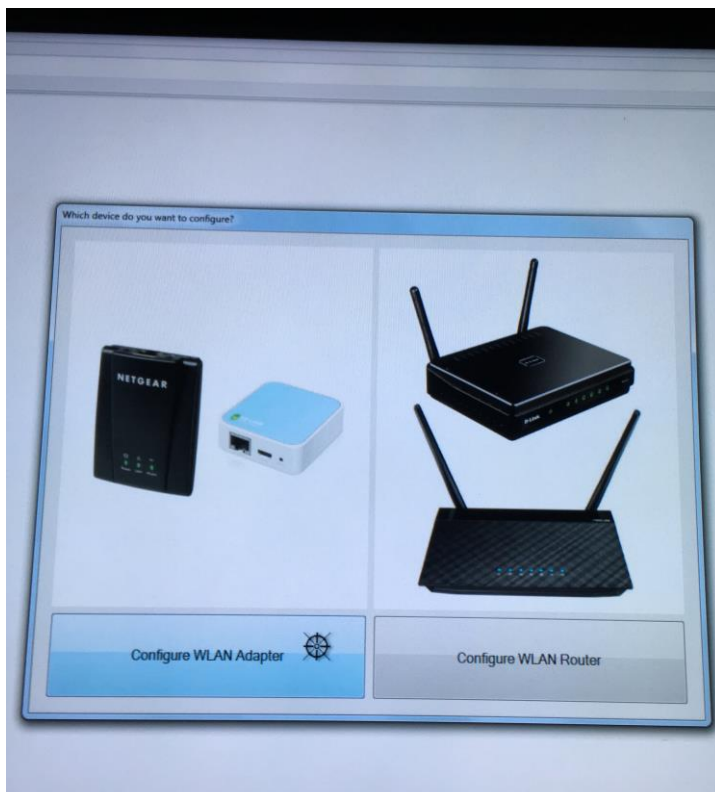

7. Sie befinden sich nun im Statusfeld des WLAN Adapters.

tp-link 300M Wireless N Nano Router  
Model No. TL-WR802N

Status

Quick Setup

Operation Mode

Network

Wireless

DHCP

System Tools

Logout

Status

Firmware Version: 3.16.9 Build 160801 Rel.38965n  
Hardware Version: WR802N v3 00000000

Wired

MAC Address: C0-25-E9-DC-1C-44  
IP Address: 192.168.0.101  
Subnet Mask: 255.255.255.0

Wireless

Operation Mode: **Client**  
Wireless Name of Root AP: Service2  
Channel: 6  
Mode: 11bgn mixed  
Channel Width: 40MHz  
Max TX Rate: 300Mbps  
MAC Address: C0-25-E9-DC-1C-44  
Client Status: Run

Traffic Statistics

	Received	Sent
Bytes:	75,941	122,092
Packets:	274	575

System Up Time: 0 days 00:01:57 [Refresh](#)

8. Auf der linken Seite wählen Sie den Punkt „**Quick Setup**“ aus.

tp-link 300M Wireless N Nano Router  
Model No. TL-WR802N

Status

**Quick Setup**

Operation Mode

Network

Wireless

DHCP

System Tools

Logout

Quick Setup

Run the Quick Setup to manually configure your internet connection and wireless settings.  
To continue, please click the **Next** button.  
To exit, please click the **Exit to Status page** button.

[Exit to Status page](#) [Next](#)

9. Klicken Sie anschließend auf „**Next**“.

10. Wählen Sie nun „**Client**“ aus und klicken Sie auf „**Next**“.

tp-link 300M Wireless N Nano Router  
Model No. TL-WR802N

Status

**Quick Setup**

Operation Mode

Network

Wireless

DHCP

System Tools

Logout

Quick Setup - Operation Mode

During Travel


Wireless Router(Default)  
 Hotspot Router

At Home


Access Point  
 Range Extender  
 **Client**  
Act as a "Wireless Adapter" to connect your wired devices (e.g. Blu-ray player, smart TV) to existing Wi-Fi

[Back](#) [Next](#)

11. Nun wird ein Scan der Wlan-Netzwerke durchgeführt.

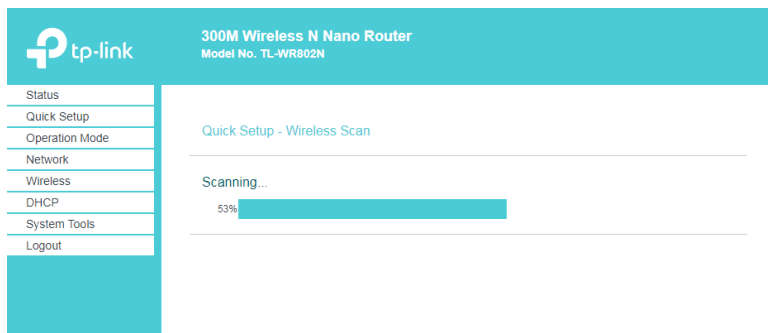

12. Hier werden alle erkannten Wlan-Netzwerke angezeigt.  
Wählen Sie nun Ihr gewünschtes Wlan-Netzwerk aus und klicken Sie auf „Next“.

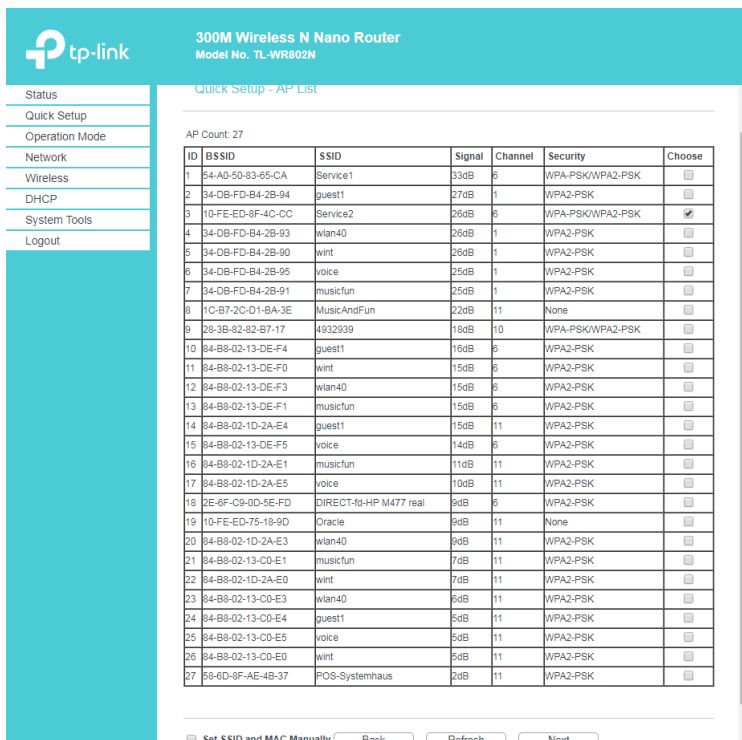

13. In der Zeile Root Ap Wireless Password geben Sie das Passwort des Wlan-Netzwerkes ein (die Tastatur aktivieren Sie rechts unten am Bildschirm) und klicken Sie dann auf „Next“.

The screenshot shows the 'Quick Setup - Wireless Setting' page for a TP-Link 300M Wireless N Nano Router (Model No. TL-WR802N). The left sidebar contains a navigation menu with options: Status, Quick Setup, Operation Mode, Network, Wireless, DHCP, System Tools, and Logout. The main content area is titled 'Quick Setup - Wireless Setting' and includes a 'Client Mode Setting' section. In this section, the 'Wireless Name of Root AP' is set to 'Service2' (also called SSID) and the 'MAC Address of Root AP' is '10-FE-ED-8F-4C-CC'. A note below states: 'You can click the Back button to scan the network SSIDs, and then choose the target one to setup the connection.' The 'Wireless Security Mode' is set to 'Most Secure(WPA/WPA2-PSK)' with an 'Auto-Detected' label. The 'Root AP Wireless Password' is 'Service2'. A note below the password field states: 'You can enter ASCII or Hexadecimal characters. For Hexadecimal, the length should be between 8 and 64 characters; for ASCII, the length should be between 8 and 63 characters. For good security it should be of ample length and should not be a commonly known phrase.' At the bottom of the page are 'Back' and 'Next' buttons.

14. Die nun hier angezeigten Einstellungen dürfen nicht verändert werden. Klicken Sie auf „Next“.

The screenshot shows the 'Quick Setup - Network Setting' page for a TP-Link 300M Wireless N Nano Router (Model No. TL-WR802N). The left sidebar contains a navigation menu with options: Status, Quick Setup, Operation Mode, Network, Wireless, DHCP, System Tools, and Logout. The main content area is titled 'Quick Setup - Network Setting' and includes a 'Type' dropdown set to 'Smart IP(DHCP)'. A note below states: 'Note: The IP parameters cannot be configured if you have chosen Smart IP (DHCP) (In this situation the device will help you configure the IP parameters automatically as you need).' The 'IP Address' is '192.168.0.254' and the 'Subnet Mask' is '255.255.255.0'. A note below states: 'We recommend you configure this AP with the same IP subnet and subnet mask, but different IP address from your root AP/Router.' The 'DHCP Server' is set to 'Enable'. At the bottom of the page are 'Back' and 'Next' buttons.

15. Klicken Sie bitte auf „Finish“ um die Konfiguration abzuschließen und warten Sie so lange bis das Statusfeld angezeigt wird.

The screenshot shows the 'Quick Setup - Review Setting' page for a TP-Link 300M Wireless N Nano Router (Model No. TL-WR802N). The left sidebar contains a navigation menu with options: Status, Quick Setup, Operation Mode, Network, Wireless, DHCP, System Tools, and Logout. The main content area is titled 'Quick Setup - Review Setting' and includes a congratulatory message: 'Congratulations! This device is now connecting you to the Internet. For detailed settings, please click other menus if necessary.' Below this is a confirmation message: 'Confirm the configuration you have set. If anything is wrong, please go Back to reset. It's recommended to take a note of these settings that you'll need later for reference.' The 'Wireless Settings' section shows: Operation Mode: Client, Wireless Name of Root AP(SSID): Service2, MAC Address of Root AP(BSSID): 10-FE-ED-8F-4C-CC, Wireless Security Mode: Most Secure(WPA/WPA2-PSK), and Root AP Wireless Password: Service2. The 'Network Settings' section shows: Default Access: http://tplinkwifi.net, Login UserName: admin, Login Password: admin, and LAN Type: Smart IP(DHCP). At the bottom of the page are 'Save', 'Back', and 'Finish' buttons.

16. Sie befinden sich nun wieder im Statusfeld des WLAN Adapters, wo Sie die Übersicht der vorgenommenen Einstellungen sehen können.

**tp-link** 300M Wireless N Nano Router  
Model No. TL-WR802N

**Status**

Firmware Version: 3.16.9 Build 160801 Rel.38965n  
Hardware Version: WR802N v3 00000000

**Wired**

MAC Address: C0-25-E9-DC-1C-44  
IP Address: 192.168.0.101  
Subnet Mask: 255.255.255.0

**Wireless**

Operation Mode: **Client**  
Wireless Name of Root AP: Service2  
Channel: 6  
Mode: 11bgn mixed  
Channel Width: 40MHz  
Max Tx Rate: 300Mbps  
MAC Address: C0-25-E9-DC-1C-44  
Client Status: Run

**Traffic Statistics**

	Received	Sent
Bytes:	274,226	164,054
Packets:	958	804

System Up Time: 0 days 00:10:43

17. Der WLAN Adapter ist nun vollständig konfiguriert.

18. Zur Überprüfung der Verbindung wählen Sie die Option „**Championsnet**“ im Testmodus aus und klicken dann auf „**Verbindung testen**“.

Gerät/Aufstellplatz

Maschinennummer: 0  
Name des Lokals:  
Ptz/Ort:  
Adresse:  
Rufnummer:  
Faxnummer:  
Email:  
Land: Österreich

Verbindung (Network - Direct)

Rufnummer:  
Benutzername:  
Uhrzeit: 22:50

Aktivieren

Gerät/Aufstellplatz

Maschinennummer: 0  
Name des Lokals:  
Ptz/Ort:  
Adresse:  
Rufnummer:  
Faxnummer:  
Email:  
Land: Österreich

Verbindung (Network - E) Verbindung erfolgreich hergestellt.

Rufnummer:  
Benutzername:  
Uhrzeit:

Aktivieren